

AVVOLGITUBO AUTOMATICO

SMALL

AUTOMATIC HOSE REELS

TO.ME.S. GREASE

SINCE 1977 Made in Italy ISO 9001:2008



Avvolgitubo automatico per grasso resistente alle intemperie. Solido, compatto, con perdite di carico ridotte al minimo. Possibilità di arresto svolgimento del tubo ad ogni giro.



Grease Automatic Hose Reel, weatherproof. Solid, compact, minimum pressure loss. Hose-Stop at any turn possible.




GAVT0484

PAINTED STEEL



MULTI POSITION



UP TO
10
mt

HOSE
R2AT
400 bar


AUTOMATIC
RETURN
HOSE

DEVICE
HOSE
GUIDE


DEVICE
HOSE
BUMPER

DEVICE
HOSE
STOP

DIMENSION (mm)

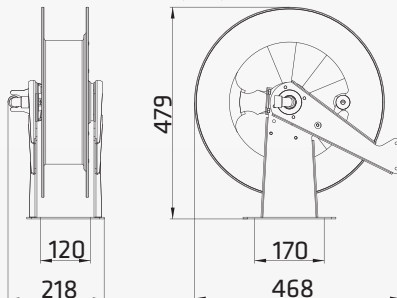

REVOLVING BRACKET



HSTF0441

name	hose including		hose max		bar max	IN	OUT	weight		packing		code	
	mt	ft	mt	ft				kg	lbs	cm	inch		
SMALL	NO		1/4"	10	32,8	400	1/4" F BSP	1/4" M BSP	12	26,5	46 x 46 x 27	18,1 x 18,1 x 10,6	GAVT0483
	1/4"	10	32,8			400	1/4" F BSP	1/4" M BSP	15,5	34,2	46 x 46 x 27	18,1 x 18,1 x 10,6	GAVT0484

TO.ME.S. GREASE


SINCE 1977 Made in Italy ISO 9001:2008



Avvolgitubo automatico per grasso resistente alle intemperie.
Solido, compatto, con perdite di carico ridotte al minimo.
Possibilità di arresto svolgimento del tubo ad ogni giro.



Grease Automatic Hose Reel, weatherproof.
Solid, compact, minimum pressure loss.
Hose-Stop at any turn possible.

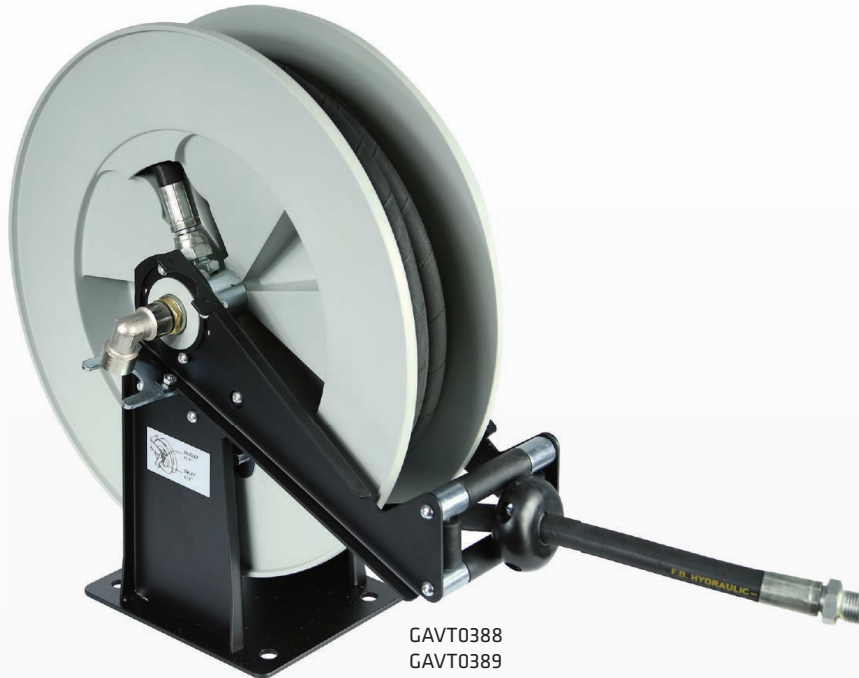

GAVT0388
GAVT0389


POLYPROPYLENE



PAINTED STEEL



MULTI POSITION



UP TO
15
mt

HOSE
R1AT
400 bar


AUTOMATIC
RETURN
HOSE

DEVICE
HOSE
GUIDE


DEVICE
HOSE
BUMPER

DEVICE
HOSE
STOP

DIMENSION
(mm)

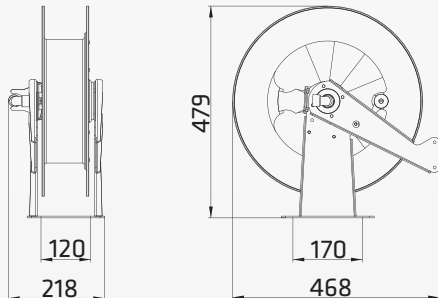

REVOLVING BRACKET



name	hose including		hose max	bar max	IN	OUT	weight		packing		code
	mt	ft					kg	lbs	cm	inch	
MEDIUM A	NO		1/4"	400	1/4" F BSP	1/4" M BSP	19	41,9	46 x 55 x 24	18,1 x 21,7 x 9,4	GAVT0387
	1/4"	10	32,8	400	1/4" F BSP	1/4" M BSP	23	50,7	46 x 55 x 24	18,1 x 21,7 x 9,4	GAVT0388
	1/4"	15	49,2	400	1/4" F BSP	1/4" M BSP	24	52,9	46 x 55 x 24	18,1 x 21,7 x 9,4	GAVT0389

AVVOLGITUBO AUTOMATICO

MEDIUM C

AUTOMATIC HOSE REELS

TO.ME.S. GREASE

SINCE 1977 Made in Italy ISO 9001:2008



Avvolgitubo automatico per grasso resistente alle intemperie.
Solido, compatto, con perdite di carico ridotte al minimo.
Possibilità di arresto svolgimento del tubo ad ogni giro.



Grease Automatic Hose Reel, weatherproof.
Solid, compact, minimum pressure loss.
Hose-Stop at any turn possible.



GAVT0385
GAVT0386

REVOLVING BRACKET




POLYPROPYLENE



PAINTED STEEL



MULTI POSITION



UP TO
15
mt

HOSE
R2AT
400 bar




AUTOMATIC
RETURN
HOSE

DEVICE
HOSE
GUIDE

DEVICE
HOSE
BUMPER

DEVICE
HOSE
STOP

DIMENSION (mm)

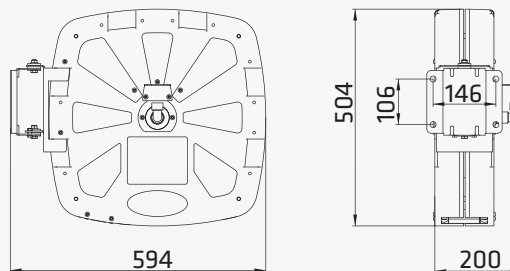

name	hose including	mt		ft		hose max	mt	ft	bar max	IN	OUT	weight		packing		code
												kg	lbs	cm	inch	
MEDIUM C	NO			1/4"	15	49,2			400	1/4" F BSP	1/4" M BSP	20,5	45,2	54 x 61 x 24	21,3 x 24 x 9,4	GAVT0384
	1/4"	10	32,8						400	1/4" F BSP	1/4" M BSP	24,5	54	54 x 61 x 24	21,3 x 24 x 9,4	GAVT0385
	1/4"	15	49,2						400	1/4" F BSP	1/4" M BSP	25,5	56,2	54 x 61 x 24	21,3 x 24 x 9,4	GAVT0386

TO.ME.S. GREASE

SINCE 1977 Made in Italy ISO 9001:2008



Tubo in gomma sintetica con rete in acciaio per i kit grasso.

Synthetic rubber hose with steel wire for kits grease.



name	hose	length mt	made in	W.P.	connection		code
HOSE	1/4"	2	synthetic rubber	400 bar	1/4" M BSP	3/8" M BSP	GTUB0744
	1/4"	3	synthetic rubber	400 bar	1/4" M BSP	3/8" M BSP	GTUB0745
	1/4"	4	synthetic rubber	400 bar	1/4" M BSP	3/8" M BSP	GTUB0746
	1/4"	5	synthetic rubber	400 bar	1/4" M BSP	3/8" M BSP	GTUB0747
	1/4"	6	synthetic rubber	400 bar	1/4" M BSP	3/8" M BSP	GTUB0748
HOSE for hose reel	1/4"	10	synthetic rubber	400 bar	1/4" M BSP	1/4" F BSP 90°	GTUB0017
	1/4"	10	synthetic rubber	400 bar	1/4" M BSP	1/4" F BSP	GTUB0643
	1/4"	15	synthetic rubber	400 bar	1/4" M BSP	1/4" F BSP	GTUB0644
HOSE STOP					1/4" - 3/8" - 1/2"	RHSP0012	
REVOLVING BRACKET						HSTF0441	